

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 465 158 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
22.01.1997 Bulletin 1997/04

(51) Int. Cl.⁶: **A61B 17/58**, A61B 17/70

(21) Application number: **91305880.6**

(22) Date of filing: **28.06.1991**

(54) Apparatus for use in the treatment of spinal disorders

Vorrichtung zur Behandlung von Wirbelsäulenerkrankungen

Dispositif pour traiter des affections de la colonne vertébrale

(84) Designated Contracting States:
BE DE ES FR GB IT NL SE

(30) Priority: **04.07.1990 GB 9014817**

(43) Date of publication of application:
08.01.1992 Bulletin 1992/02

(73) Proprietor: **Mehdian, Seyed Mohammad Hossein**
Exeter, EX2 4UE, Devon (GB)

(72) Inventor: **Mehdian, Seyed Mohammad Hossein**
Exeter, EX2 4UE, Devon (GB)

(74) Representative: **W.P. Thompson & Co.**
Coopers Building,
Church Street
Liverpool L1 3AB (GB)

(56) References cited:

EP-A- 0 151 892
EP-A- 0 348 272
FR-A- 2 624 720
GB-A- 2 173 104
US-A- 3 604 487

EP-A- 0 346 521
DE-A- 3 916 198
FR-A- 2 642 643
GB-A- 2 223 406

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 465 158 B1

Description

The present invention relates to apparatus for use in the treatment of spinal disorders.

In certain methods of treatment of spinal disorders it is desirable to substantially immobilise selected segments of the spinal column against movement relative to one another. For example, one implant system has involved the use of screws, nuts and plates, the screws being inserted in pedicles of selected segments of a spinal column and the plates attached to the screws by means of nuts. Such a system has a number of disadvantages amongst which are difficulties experienced in bending the plate or plates to the required curvature to fit. In another system plates are placed in position first and are then secured by screws and there is considerable risk of breakage of the screws as a result of movement. In yet another system screw threaded rods are used instead of plates or smooth rods and are fixed to slotted pedicle screws by nuts with one nut at each side of each screw, but considerable difficulty is experienced in fixing the rods in the pedicle screws by the nuts as a consequence of the contour of the lumbar spine. In another implant system, slot headed screws have been used in cooperation with rods clamped in the slots of the screws by securing screws; the clamping of the rods has not always been satisfactory and the process of screwing the securing screws into the heads of the slot headed screws has created a substantial risk of splitting the slotted heads of the screws and also has made it extremely difficult to maintain a desired degree of tightness of clamping since the act of tightening one securing screw creates the risk of loosening of an adjacent securing screw.

In Fr-A-2624720 an implant system is disclosed for use in fixing one segment of a spinal column relatively to another segment thereof by means of at least one fixing rod. The system includes screw members for insertion in the pedicles of the segments, each screw member having an enlarged head with an open transverse slot to receive a fixing rod. A clamp member is screw threadedly connected with the head of the screw member and a clamp portion of the clamp member fits around the outside of the head of the screw member and engages a fixing rod inserted in the said slot. As the clamp member is tightened down on the fixing rod, the clamp portion slides over the surface of the fixing rod and presses the fixing rod against the base of said slot.

An object of the present invention is to provide an implant system for internal fixation which is relatively simple to use, is relatively easy to manufacture, which is not bulky, and which provides for an improved attachment to the spinal column.

According to the present invention, there is provided an implant system for use in fixing one segment of a spinal column relatively to another segment thereof by means of at least one fixing rod member in the treatment of spinal disorders, comprising a screw member for insertion in the pedicle of a segment of a spinal col-

umn and having an enlarged diameter head with an open ended transverse slot to receive a fixing rod member, and clamp means having a screw threaded connection with the head of the screw member and a clamping portion fitting around the outside of the head of the screw member for engaging a fixing rod member inserted in the transverse slot in the head of the screw member and clamping it therein, characterised in that the clamp means comprises a collar which can be slipped over the outside of the head of the screw member to engage the fixing rod member inserted in the transverse slot in the head of the screw member and serve as the clamping portion, and a clamping screw having a screw threaded shank for insertion into a screw threaded counterbore in the head of the screw member and a flanged head for engagement with the collar, the axial length of the shank of the clamping screw being less than the axial length of the collar whereby the fixing rod member can be clamped in the transverse slot by the collar without being engaged by the end of the shank of the clamping screw.

Preferably the screw-threaded connection between the head of the screw member and the clamping means comprises an internally screw-threaded counterbore in the head of the screw member and an externally screw-threaded shank in the clamp means.

Preferably, the head of the screw member has a reduced diameter portion adjoining the open end of the transverse slot and counterbore over which the collar is slipped. When the head of the screw member, the collar and the flanged head of the clamping screw have substantially the same external diameter, a generally smooth external surface can be provided, which can be enhanced by providing a hexagonal socket in the flanged head of the clamping screw for engagement with a hexagonal ended driver or key. The hexagonal socket can be screw threaded and receive a further locking screw to engage the rod member and provide additional clamping.

Whilst in a preferred embodiment an implant system comprises a screw member for insertion in the pedicle of a segment of a spinal column, a collar to be slipped over the outside of the head of the screw member and a separate clamping screw for insertion in the head of the screw member, it is possible for the collar and clamping screw to be combined in the form of a skirted screw-in cap; moreover it is also possible for the collar and clamping screw to be combined in the form of a skirted screw-on cap.

When using an implant system embodying the present invention for fixing one or more segments of a spinal column relatively to one another, a hole is drilled first into a pedicle of a selected segment of the spinal column and the screw member is screwed therein. A similar procedure is followed in other segments and when all the desired screw members have been inserted, those at each side of the spinal column are aligned with one another so far as the transverse slots are concerned and a rod member, shaped as desired if

necessary, is inserted in the transverse slots of the inserted screw members at one side of the spine. A collar is slipped over the reduced diameter portion of the head of each inserted screw member, and then clamping screws are inserted into the threaded counterbores and tightened to cause the collars to apply the necessary clamping pressure to clamp the rod member in the slots.

In order that an implant system embodying the present invention can be used to best advantage, ancillary instruments are desirable for use therewith. Such instruments comprise for example a centre punch for locating a hole to be drilled in a pedicle of a segment of a spinal column, and a locking screw driver for screwing an implant into a drilled hole in a segment. A further aspect of the present invention lies in such ancillary instruments as herein described and useful for utilising an implant system embodying the present invention to best advantage.

The invention will be further described by way of example with reference to the accompanying drawings, in which:-

Fig. 1 is a side view of an implant or insert of an implant system according to a preferred embodiment of the present invention;

Fig. 2 is an end view of the implant of Fig. 1;

Fig. 3 is an exploded view of the parts of the implant of Fig. 1;

Fig. 4 is a diagrammatic illustration of a rod member clamped in an implant of Fig. 1;

Fig. 5 is a sectional view to an enlarged scale of a rod member clamped in an implant;

Fig. 6 is a diagrammatic rear elevation of part of a spinal column in which selected segments of the spinal column have been fixed relatively to one another by implants and rod members;

Fig. 7 is a side illustration of Fig. 6;

Fig. 8 is a longitudinal section of a centre punch suitable for use with an implant system embodying the present invention;

Fig. 9 is an end view of a locking screw driver suitable for use for inserting an implant embodying the present invention into a hole drilled in a pedicle of a segment of a spinal column;

Fig. 10 is a longitudinal section of the screw driver of Fig. 9 showing diagrammatically an implant secured therein;

Fig. 11 is an exploded view corresponding to Fig. 3 of the parts of the implant system according to a further embodiment of the invention; and

Fig. 12 is a sectional view to an enlarged scale of a rod member clamped in an implant system of Fig. 11.

Referring initially to Figs. 1 and 2, an implant or insert 10 for screwing into a pedicle of a segment of a spinal column comprises a screw member 11 having a screw-threaded shank 12 and a larger diameter head

13, a collar 14 slipped onto the outside of the head, and a clamping screw 15. A transversely extending slot 16 is formed in the head 13 and a hexagonal socket 21 is formed in the clamping screw 15.

The screw member 11, collar 14 and clamping screw 15 are shown in greater detail diagrammatically in Fig. 3. The slot 16 in the head 13 of the screw member is open ended and has a radius bottom and the width of the slot and the radius bottom of the slot are selected according to the diameter of a rod member to be received therein. The open end of the slot 16 is counter-bored and screw-threaded as at 17 to receive a correspondingly screw-threaded shank 18 of the clamping screw 15. Adjoining the open end of the slot 16 the head 13 of the screw member has a reduced diameter portion 19 onto which the collar 14 can be slipped. In use, the clamping screw 15 and the collar 14 are removed from the head of a screw member 11 which is then screwed into a pedicle of a segment of a spinal column as will be hereinafter described; subsequently a rod member such as 20 is laid in the slot as illustrated in Fig. 4, the collar 14 is slipped over the outside of the head of the screw member, and the clamping screw 15 is screwed into the head to cause its flanged head 22 to apply clamping pressure to the rod member 20 through the collar 14.

It is preferable for the clamping pressure to be applied to the rod member 20 by the collar 14 and not by the shank 18 of the clamping screw 15. This can readily be achieved as illustrated in Fig. 5 by making the axial length of the shank 18 of the clamping screw 15 less than the axial length of the collar 14.

It is very desirable that the external surface of the screw member, the collar and clamping screw should be smooth and free of roughness, and it is advantageous if the head 13, the collar 14 and the flanged head of the clamping screw have substantially the same diameter. Likewise it is desirable that wherever possible corners should be rounded and that sharp edges should be avoided.

It is believed that the advantages of an implant system embodying the present invention can best be understood by description of one manner in which such an implant system can be used in the treatment of spinal disorders since a number of ancillary instruments enable the implants to be used more beneficially.

Referring now to Figs. 6 and 7 let it be supposed that it is desired to fix segments 30 and 31 of a spinal column relatively to one another and relatively to sacrum 32 by means of six implants or inserts 34 and two rod members 35, 36. First the collars and clamping screws are removed from the heads of the screw members. Suitable diameter holes are drilled into the pedicles such as 37 of each of the segments. Since it is important that these holes should be drilled in the appropriate places, it is convenient to employ a centre punch such as that illustrated diagrammatically in Fig. 8 to locate the centre of each hole to be drilled. Referring now to Fig. 8, a suitable centre punch 40 comprises a

pointed punch member 41 secured to an abutment 42 attached to one end of a tubular handle 43 having at its other end a closure member 44. Surrounding the punch 41 within the tubular handle 43 is a spring member 45 acting between the abutment member 42 and an annular member 46 within the tubular handle 43 and from which extends a tube member 47 surrounding the punch 41. The outer end of the tube member 47 is shaped as at 48 to enable it to be located in a desired position for example straddling a ridge at the rear of a pedicle of a segment of a spinal column. In use, the tubular member is appropriately located against a segment of a spinal column, and pressure is exerted on the anvil 42 to bring the centre punch member 41 into contact with the spinal column, whereupon one or more blows are applied to the anvil 42 to create in the segment of the spinal column a punch hole for location of a drill. The centre punch 40 can be dismantled for cleaning and sterilisation by unscrewing the anvil 42 from the tubular handle 43.

After the necessary holes have been drilled in the pedicles of the segments of the spinal column, it is necessary to screw into place each of the screw members. For this purpose it is desirable for each screw member to be held securely on a screw driver, and one form of locking screw driver 50 for use with these screw members is illustrated in Figs. 9 and 10, to which reference will now be made. Screw driver 50 comprises a handle 51 surrounding a tubular member 52 which projects from one end of the handle and has at its open end a transversely extending dowel pin 53 of a diameter compatible with the width of a slot 16 in the head of a screw member. In order that a screw member can be securely held in the screw driver 50 a rod 54 extends inside the tube 52 and has at its end a screw-threaded portion 55 to be received in the screw-threaded counterbore 17 upon relative rotation of an external knob 56 attached to the other end of the rod 54. By means of a screw driver 50 a screw member can be adequately held and thereby accurately located so as to be screwed into the pre-formed hole in the pedicle of a segment; once the screw member has been screwed in sufficiently far the screw driver 50 can be released by unscrewing the threaded end of the rod 54 out of the screw-threaded counterbore 17 by rotating the knob 56 relatively to the handle 51. The rod 54 can be withdrawn from inside the tube 52 for the purpose of cleaning and sterilisation.

Whilst the locking screw driver illustrated in Figs. 9 and 10 is particularly suitable for the commencement and the major part of the process of screwing the shank of a screw member into a prepared hole in the pedicle of a segment, a screw driver having a generally T-shaped head can be inserted into the slot in the head of a screw member for the final part of the screwing operation and for orientating the head of each of the screwed in screw members into alignment with the other inserted screw members.

The hexagonal socket 21 is preferably in the form of a throughbore opening in the head 22 of the clamping

screw 15 and enables the clamping screw to be placed on and retained on a hexagonal cross section end of a driver to facilitate its insertion in the screw-threaded counterbore 17 and the application of a torque thereto.

The clamping pressure applied to the rod member 20 by the collar 14 as a result of the action of screwing the clamping screw 15 into the counterbore 17 can provide sufficient fixation for most uses, and the clamping action can be improved if the collar 14 is distorted a little under the clamping pressure since the area of contact between the rod member 20 and the collar 14 can thereby be increased. If further clamping is required a locking screw can be provided in the clamping screw 14 and screwed in to engage the rod member 20.

Such a further locking screw is provided in an implant system according to a further embodiment illustrated in Figs. 11 and 12 to which reference will now be made. The screw member 11 and collar 14 are the same as in the embodiment of Figs. 1 to 5, but the hexagonal socket 21 in the clamping screw 15 additionally screw threaded as at 23 to receive further locking screw 24 in the form of a grub screw with a hexagonal socket 24. After the clamping screw 15 has been screwed into the counterbore 17 to apply clamping pressure to the rod member 20 through the collar 14, the locking screw 24 can be screwed into the clamping screw 15 to engage the rod member 20 as illustrated in Fig. 12 and provide secondary clamping action. Preferably the axial length of the locking screw 24 is not greater than the axial length of the clamping screw 15 so that when screwed in to engage the rod member 20, it does not project above the head of the clamping screw 15.

Whilst the diameter and lengths of rod members required are largely determined by the condition of the patient, it is believed that most needs can be met with two sizes of rod member, for example 3/16 inch (4.8mm) and 1/4 inch in diameter (6.4mm), and with lengths of for example from 4cm to 14 cm. Again whilst the diameters and lengths of the screw members are largely determined by patient conditions, it is believed that two root diameters of 5mm for cortical bones and 6mm for cancellous bone are compatible with rods 3/16 inch (4.8mm) in diameter, and with root diameters of 6mm for cortical bones and 7mm for cancellous bones are compatible with rods 1/4 inch (6.4mm) in diameter. Shank lengths between 30mm and 50mm should meet most requirements. With regard to the screw-thread of the shank of a screw member, a V-shaped single start screw-thread with an angle of 60°, flattened crest, a depth in the region of 0.65 to 0.9mm, and a pitch of 3mm is suitable for most purposes. Head diameters of 13.7mm and 12.1mm, and head heights of 12.6mm and 11mm are suitable for screw members for use with 1/4 inch (6.4mm) and 3/16 inch (4.1mm) diameter rod members respectively. The shank end is preferably conical with an included angle of 40° and rounded. All the screw members, collars and clamping screws, are preferable made of stainless steel as indeed are the rod members.

An implant system embodying the present inven-

tion can provide segmental fixation for the control and stabilisation of segments of a spinal column and can be applied to a variety of clinical and pathological conditions affecting the lower thoracic and lumbar spine. The implant system can provide rigid fixation with a low failure rate and can promote graft consolidation for various types of spinal fusions. An advantage of the implant system is that it can permit early mobilisation without prolonged bedrest and bracing, and can thereby ease post-operative nursing care and promote decreased hospital stay.

A further useful feature is the provision of the hexagonal socket in the head of the clamping screw. Such socket can usefully cooperate with a hexagonal end of a screw driver upon which the clamping screw can be frictionally retained to enable it to be inserted readily into the threaded counterbore in the head of the screw member.

A particular characteristic of an implant system embodying the present invention lies in the fact that the compressive force is applied to the fixing rod by the collar under the influence of pressure applied thereto by the flanged compression screw and that the shank of the compression screw does not engage the rod member. It is believed that it is this characteristic which promotes stability of fixation. The presence of the collar around the outside of the head of the inserted screw member substantially reduces the risk of the head collapsing or becoming fractured as a result of pressure applied to the sides of the slot by the action of screwing in the clamping screw.

Claims

1. An implant system (10) for use in fixing one segment of a spinal column relatively to another segment thereof by means of at least one fixing rod member in the treatment of spinal disorders, comprising a screw member (11) for insertion in the pedicle of a segment of a spinal column and having an enlarged diameter head (13) with an open ended transverse slot (16) to receive a fixing rod member (20), and clamp means having a screw threaded connection with the head (13) of the screw member (11) and a clamping portion fitting around the outside of the head (13) of the screw member (11) for engaging a fixing rod member (20) inserted in the transverse slot (16) in the head of the screw member (11) and clamping it therein, characterised in that the clamp means comprises a collar (14) which can be slipped over the outside of the head (13) of the screw member (11) to engage the fixing rod member (20) inserted in the transverse slot (16) in the head of the screw member (11) and serve as the clamping portion, and a clamping screw (15) having a screw threaded shank (18) for insertion into a screw threaded counterbore (17) in the head of the screw member (11) and a flanged head (22) for engagement with the

collar, the axial length of the shank (18) of the clamping screw (15) being less than the axial length of the collar (14) whereby the fixing rod member (20) can be clamped in the transverse slot (16) by the collar (14) without being engaged by the end of the shank (18) of the clamping screw (15).

2. An implant system as claimed in claim 1, in which the head of the screw member (11) has a reduced diameter portion (19) adjoining the open end of the transverse slot (16) and counterbore (17) over which the collar is slipped.
3. An implant system as claimed in claim 2, in which the head of the screw member (11), the collar (14), and the flanged head (22) of the clamping screw (15) have substantially the same external diameter.
4. An implant system as claimed in any one of claims 1 to 2, in which the flanged head (22) of the clamping screw (15) has a hexagonal socket (21) for engagement with a hexagonal ended driver or key.
5. An implant system as claimed in claim 4, characterised in that the hexagonal socket (21) is screw threaded to receive therein a locking screw (24) adapted to engage said rod member (20) to provide further clamping action thereon.

Patentansprüche

1. Implantatsystem (10) zur Verwendung bei der Fixierung eines Segmentes einer Wirbelsäule relativ zu einem anderen Segment davon mit Hilfe von mindestens einem Fixierstabelement bei der Behandlung von Wirbelsäulenerkrankungen, das folgendes umfaßt: Ein Schraubelement (11) zum Einführen in den Bogenfuß (Pediculus arcus vertebrae) eines Segmentes einer Wirbelsäule und mit einem Kopf mit vergrößertem Durchmesser (13) mit einem querverlaufenden Schlitz (16) mit offenem Ende zur Aufnahme eines Fixierstabelementes (20) und ein Klemmmittel, das eine Gewindeverbindung mit dem Kopf (13) des Schraubelementes (11) aufweist und einen Klemmabschnitt, der um die Außenseite des Kopfes (13) des Schraubelementes (11) paßt, um ein Fixierstabelement (20) in Eingriff zu bringen, das in den querverlaufenden Schlitz (16) in dem Kopf des Schraubelementes (11) eingeführt wird und um es darin festzuklemmen, dadurch gekennzeichnet, daß das Klemmmittel einen Bund (14) umfaßt, der über die Außenseite des Kopfes (13) des Schraubelementes (11) geschoben werden kann, um das Fixierstabelement (20) in Eingriff zu bringen, das in den querverlaufenden Schlitz (16) in dem Kopf des Schraubelementes (11) eingeführt wird und als der Klemmabschnitt dient und eine Klemmschraube (15) mit einem Gewindeschaf (18) zum Einführen in eine Gewin-

desenkung (17) in dem Kopf des Schraubelementes (11) und einen angeflanschten Kopf (22) zum Eingriff in den Bund, wobei die axiale Länge des Schaftes (18) der Klemmschraube (15) kleiner als die axiale Länge des Bundes (14) ist, wobei das 5
Fixierstabelement (20) mittels des Bundes (14) in den querverlaufenden Schlitz (16) geklemmt werden kann, ohne durch das Ende des Schaftes (18) der Klemmschraube (15) in Eingriff gebracht zu werden. 10

2. Implantatsystem nach Anspruch 1, worin der Kopf des Schraubelementes (11) einen Abschnitt mit verringertem Durchmesser (19) aufweist, der an das offene Ende des querverlaufenden Schlitzes (16) und die Senkung (17) angrenzt, über welchen der Bund geschoben wird. 15
3. Implantatsystem nach Anspruch 2, worin der Kopf des Schraubelementes (11), der Bund (14) und der angeflanschte Kopf (22) der Klemmschraube (15) im wesentlichen den gleichen Außendurchmesser aufweisen. 20
4. Implantatsystem nach einem der Ansprüche 1 bis 2, worin der angeflanschte Kopf (22) der Klemmschraube (15) einen Innensechskant (21) zum Eingreifen in einen Sechskantschraubendreher oder -schlüssel aufweist. 25
5. Implantatsystem nach Anspruch 4, dadurch gekennzeichnet, daß der Innensechskant (21) ein Gewinde aufweist, um darin eine Sicherungsschraube (24) aufzunehmen, die zum Eingreifen in genanntes Stabelement (20) angepaßt ist, um eine weitere Klemmwirkung darauf bereitzustellen. 30 35

Revendications

1. Un système d'implant (10) destiné à être utilisé 40 pour fixer un segment d'une colonne vertébrale par rapport à un autre segment de celle-ci, au moyen d'un membre à tige de fixation au moins, dans le traitement des affections de la colonne vertébrale, comprenant un membre à vis (11) destiné à être 45 inséré dans le pédicule d'un segment d'une colonne vertébrale et ayant une tête de diamètre élargi (13) avec une fente transversale à extrémité ouverte (16) pour recevoir un membre à tige de fixation (20), et un moyen de blocage ayant un raccord fileté avec la tête (13) du membre à vis (11) et une partie de blocage s'adaptant autour de l'extérieur de la tête (13) du membre à vis (11), pour retenir un membre à tige de fixation (20) inséré dans la fente transversale (16) dans la tête du membre à vis (11) et le fixant à l'intérieur, caractérisé en ce que le moyen de blocage comprend un collier (14) que l'on peut faire glisser sur l'extérieur de la tête (13) du membre à vis (11) pour retenir le membre à 55

tige de fixation (20) inséré dans la fente transversale (16) dans la tête du membre à vis (11) et servir comme partie de blocage, et une vis de blocage (15) ayant une tige filetée (18) destinée à être insérée dans un logement cylindrique fileté (17) dans la tête du membre à vis (11) et une tête à bride (22) destinée à s'insérer dans le collier, la longueur axiale de la tige (18) de la vis de blocage (15) étant inférieure à la longueur axiale du collier (14) de sorte que le membre à tige de fixation (20) peut être fixé dans la fente transversale (16) par le collier (14) sans être retenu par l'extrémité de la tige (18) de la vis de blocage (15).

2. Un système d'implant tel que revendiqué dans la revendication 1, dans lequel la tête du membre à vis (11) a une partie à diamètre réduit (19) adjacente à l'extrémité ouverte de la fente transversale (16) et au logement cylindrique (17), sur laquelle partie à diamètre réduit on fait glisser le collier.
3. Un système d'implant tel que revendiqué dans la revendication 2, dans lequel la tête du membre à vis (11), le collier (14) et la tête à bride (22) de la vis de blocage (15), ont sensiblement le même diamètre externe.
4. Un système d'implant tel que revendiqué dans l'une quelconque des revendications 1 et 2, dans lequel la tête à bride (22) de la vis de blocage (15) a une douille hexagonale (21) destinée à l'insertion d'une clavette ou d'un tournevis hexagonal.
5. Un système d'implant tel que revendiqué dans la revendication 4, caractérisé en ce que la douille hexagonale (21) est filetée pour recevoir une vis de blocage (24) à l'intérieur, laquelle vis est adaptée pour retenir ledit membre à tige (20) afin de fournir une action de blocage supplémentaire sur celui-ci.

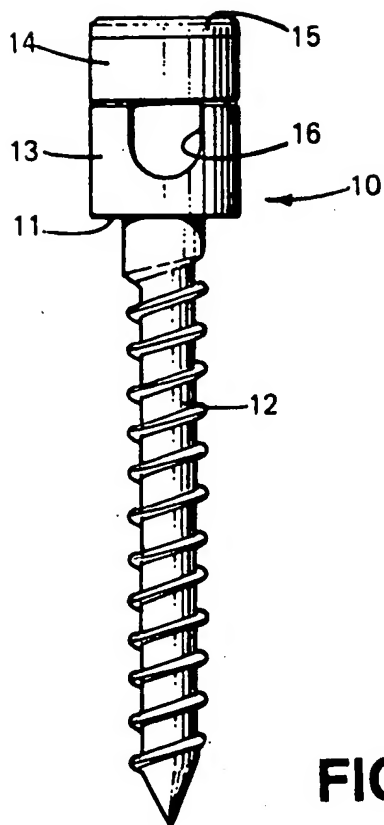


FIG. 1




FIG. 2

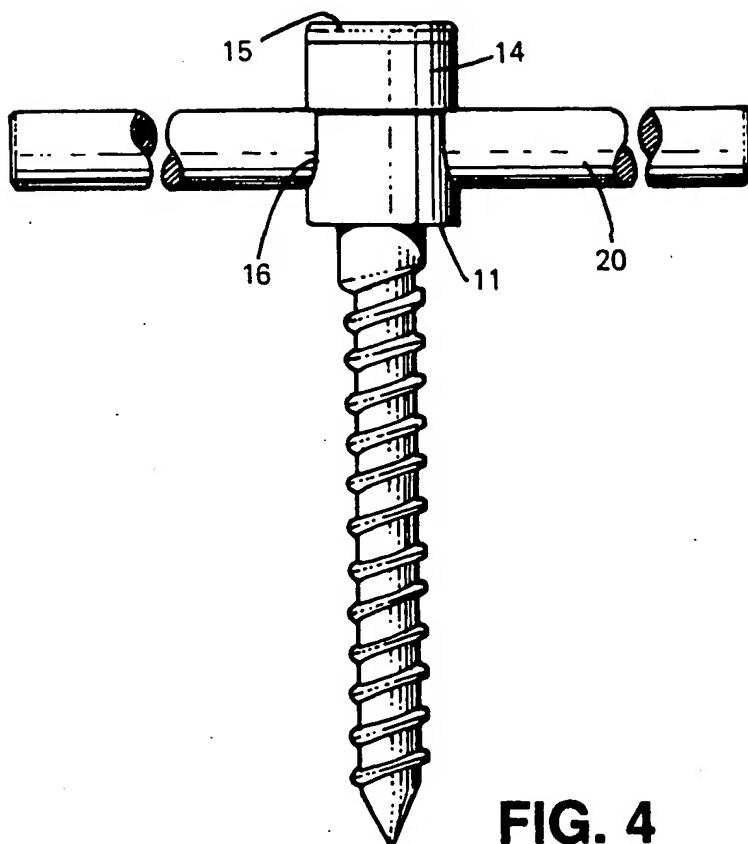


FIG. 4

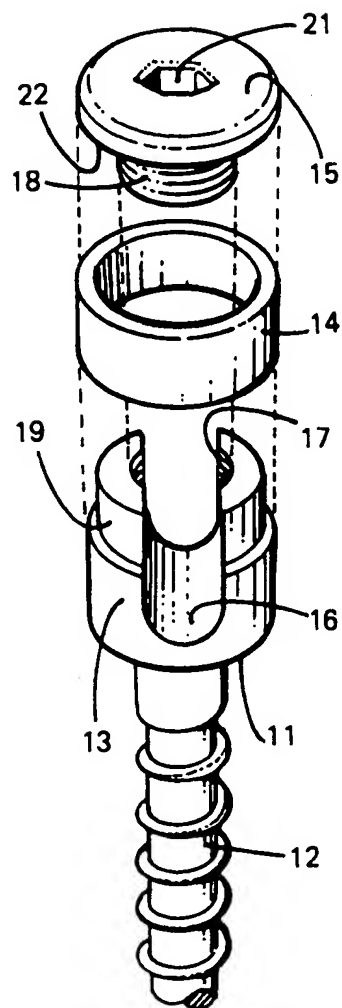


FIG. 3

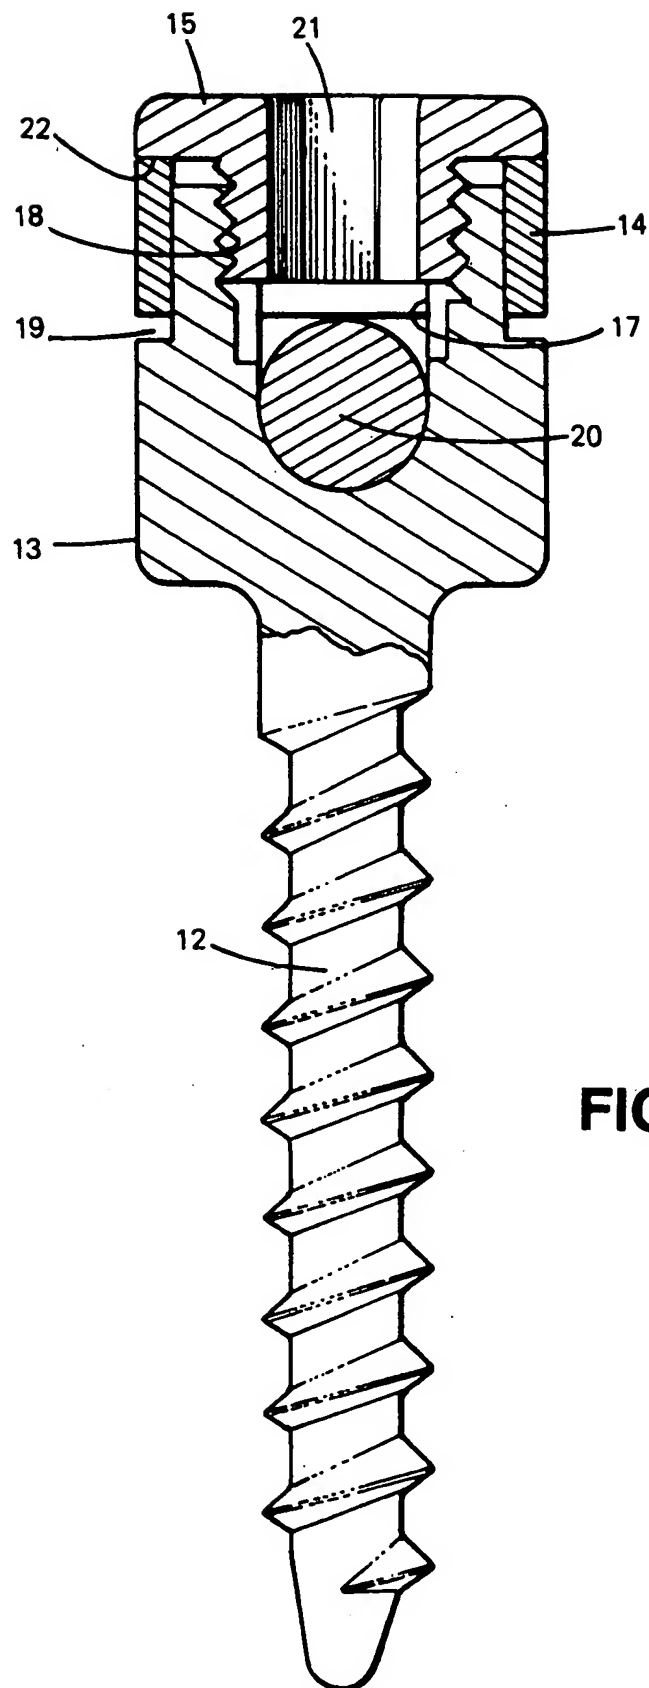


FIG. 5

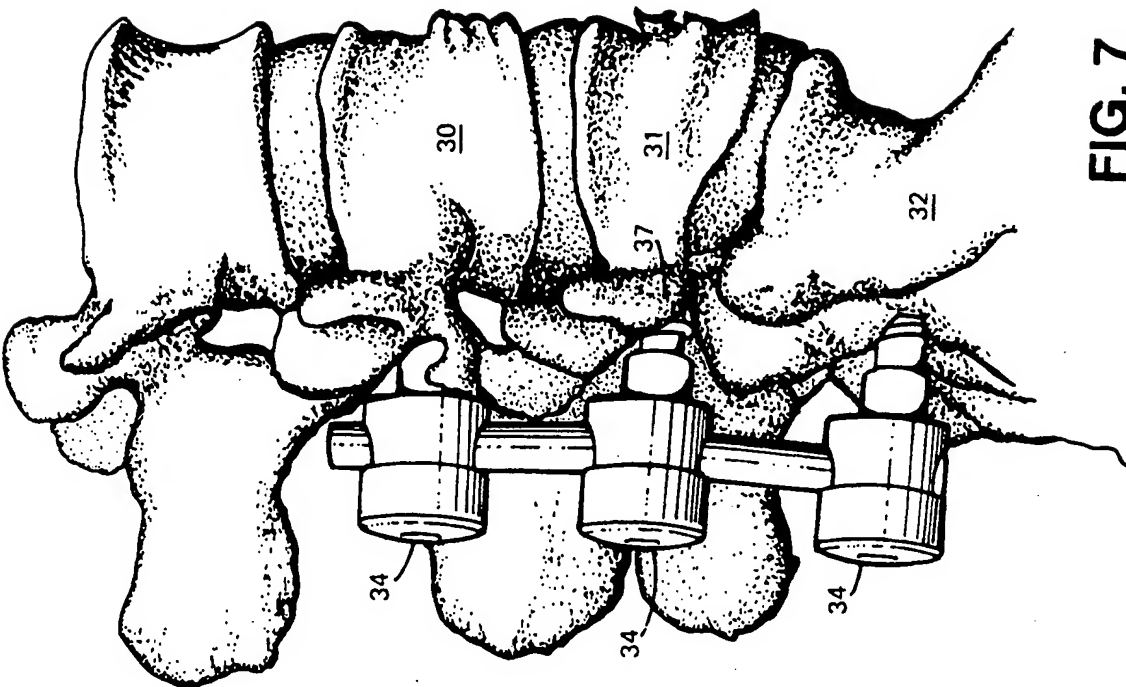


FIG. 7

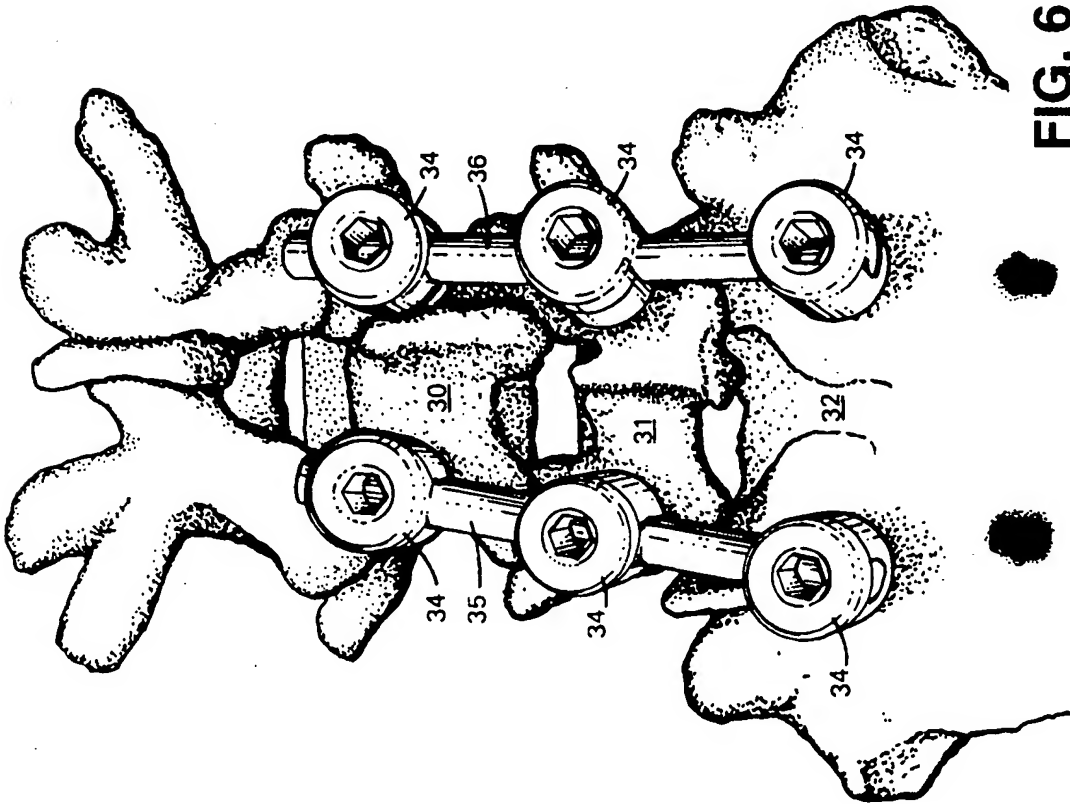


FIG. 6

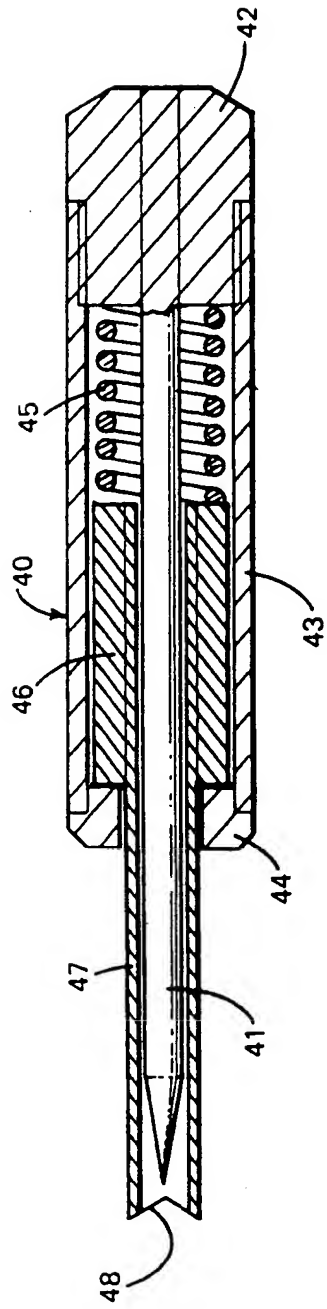


FIG. 8

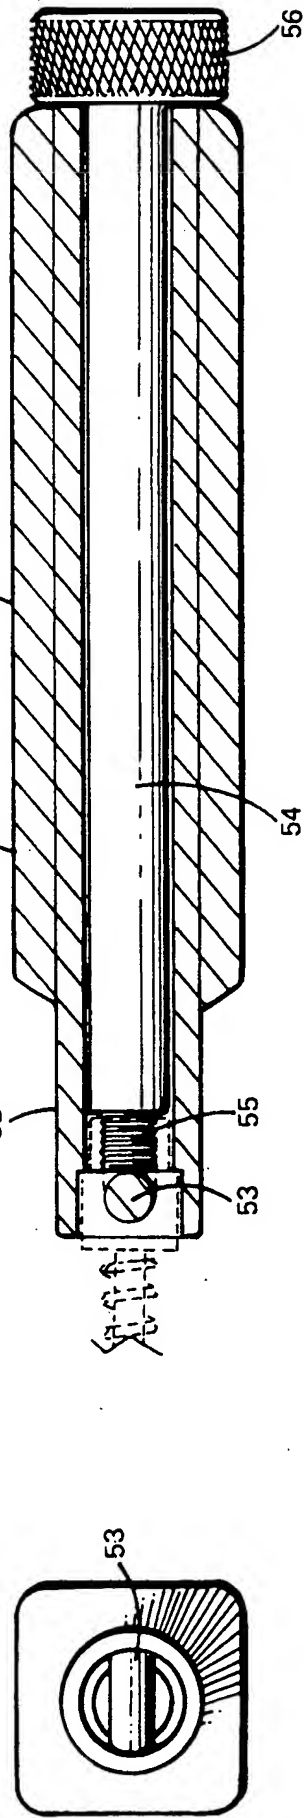


FIG. 9

FIG. 10

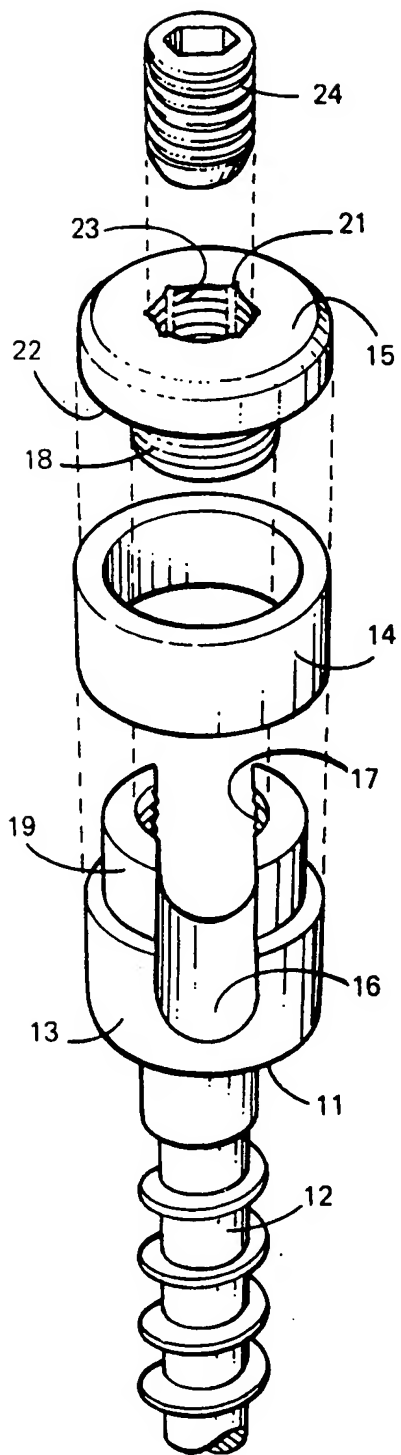


FIG. 11

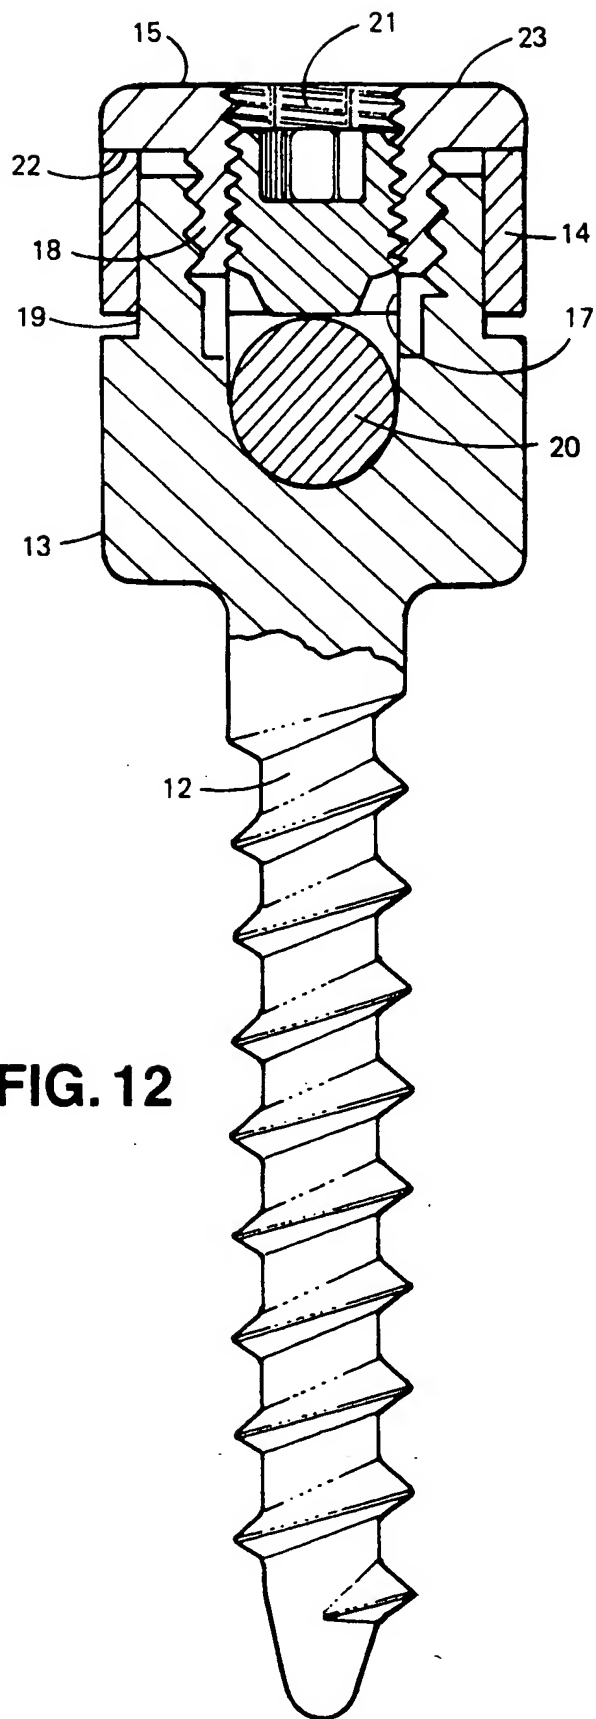


FIG. 12